




GENERAL NOTES:

- A) MATERIAL TO BE HOT DIPPED, PRE-GALVANIZED STEEL, ASTM A641, TO AVOID THE FORMATION OF ZINC WHISKERS.
- B) FINISH: ( CARBON STEEL WIRE ONLY ),
  - 1) POLYESTER POWDER COATING 1.2- 3.0 MILS THICK.
- C) DIMENSIONAL TOLERANCES
  - 1) GENERAL DIMENSIONS +/- 1/8" U.N.D.
  - 2) LENGTH +/- 1/4"
  - 3) WIDTH +/- 1/8"
  - 4) DEPTH +/- 1/8"
  - 5) ANGULAR FORMATION +/- 3 DEG.
  - 6) CAMBER SHALL NOT EXCEED 1/2" ON STANDARD 10' LENGTH.
  - 7) TWIST SHALL NOT EXCEED 1/2" ON STANDARD 10' LENGTH
- D) RIB VICE DIAMETER
  - 1) .197 (5MM) DIAMETER.
- E) LONGITUDINAL WIRE DIAMETER.
  - 1) .197 (5MM) DIAMETER
- F) CROSS SECTION AREA  
 AREA = (20 WIRES X .0438 IN<sup>2</sup>)= 876 IN<sup>2</sup>  
 UL MARKING = .8 IN<sup>2</sup>

COMPONENT LIST			
L" DIA.	ITEM	MAKE FROM	DESCRIPTION
		P/N FT XX 24X48	CO WIRE .196 DIA.
2"		2X24X48	
4"		4X24X48	
6"		6X24X48	

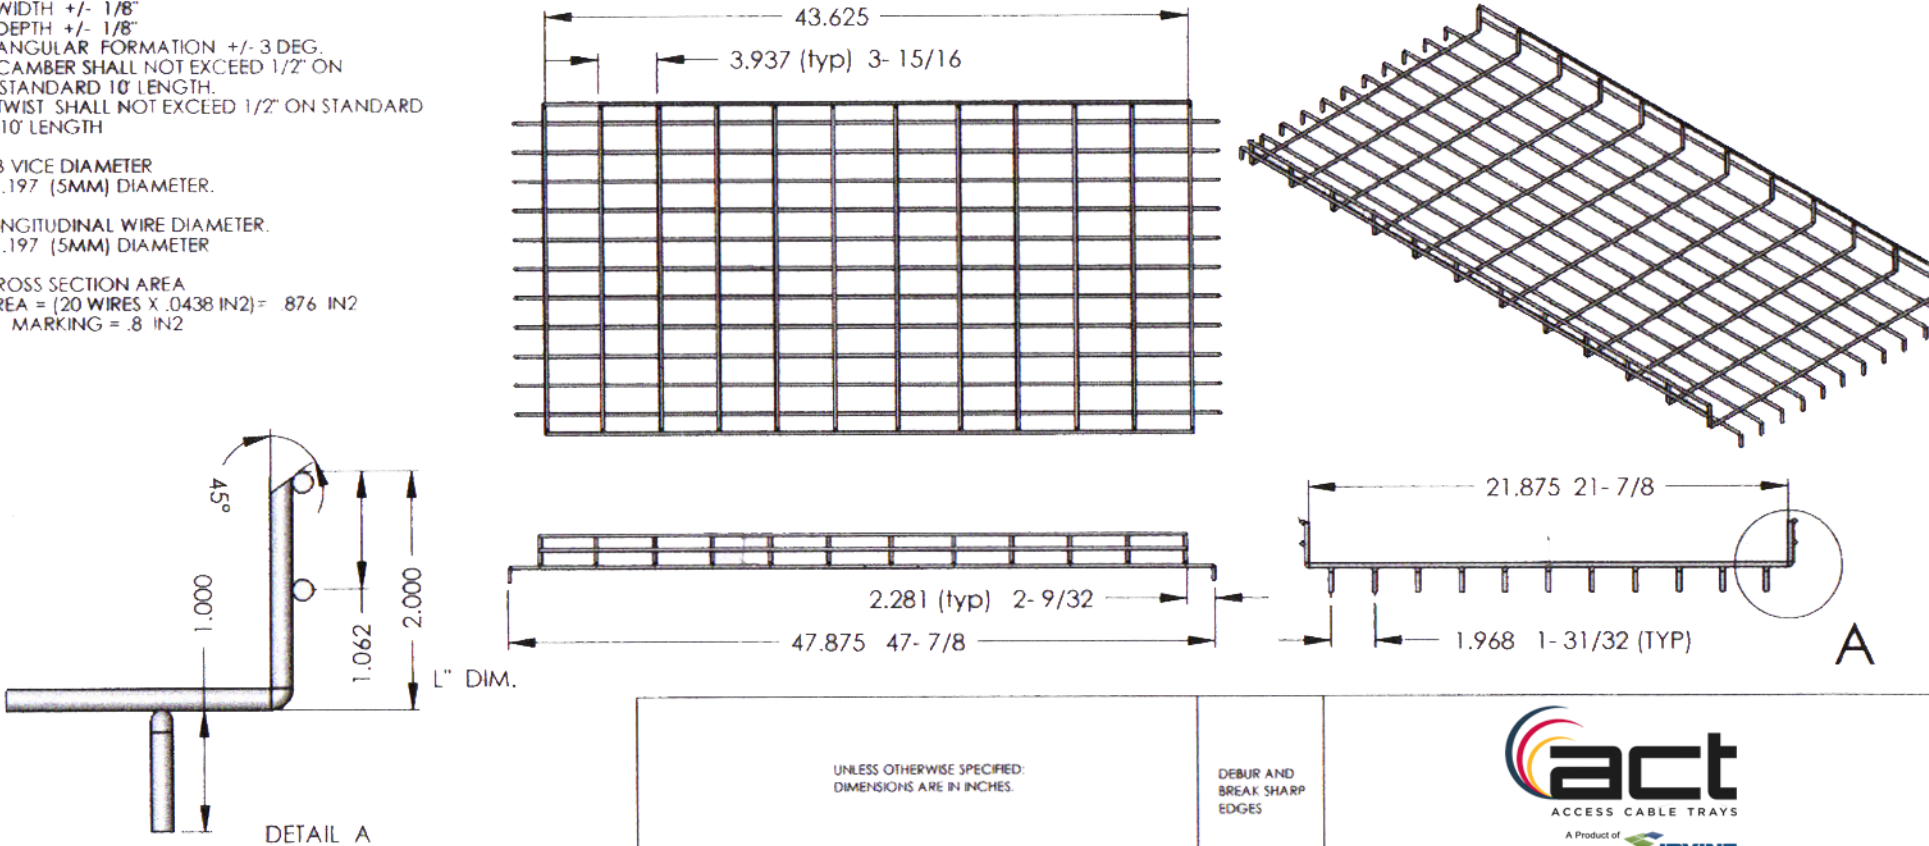

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES.					DEBUR AND BREAK SHARP EDGES	
REVISION	NAME	CHANGE	DATE			
A	AF		5-12-10			
				MATERIAL:		
				WEIGHT:		

 <small>A Product of</small> 
<b>FLOORFLEX-TRAY</b>
TITLE:
DWG NO.
FT XX 24 X 48
SHEET 1 OF 1